

8788

ImagePro 8788 Portable LCD Projector



The ImagePro 8788 is a light (5 lbs), easy-to-install portable LCD projector ideal for classroom or conference room.

8788 FEATURES

- 2200 Lumens Brightness
- XGA Resolution
- Lamp access on top
- High performance (2000 HR) filter with easy side access
- Instant on ON and OFF
- New 3000/4000 hour lamp
- Built-in Anti-theft security
- Audio "passthrough" permits use of sound system to play CDs on the PC when projector is off
- Super reliable operation



**NEW SIDE-LOADING FILTER PROVIDES
EASY FILTER MAINTENANCE**

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.

 **Convey**
SOLUTIONS


Convey by Dukane delivers control of classroom audio visual assets in sync with our Convey AClick Student Response System. Experience tomorrow's classroom today with Convey. Visit www.conveyclassrooms.com.
Call Dukane: 866.280.4298

Toll-free: 866-280-4298 • Web: www.dukane.com/av
Fax: 630-584-5156 • E-mail: avsales@dukane.com

ImagePro 8788 Portable LCD projector

Back Panel

Connections

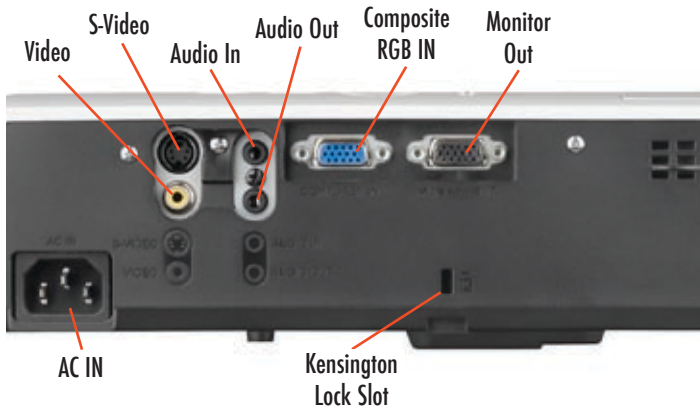

Key features:

- XGA (1024 x 768) resolution
- 2200 ANSI lumens of brightness
- Whiteboard & Blackboard Modes
- Easy maintenance in ceiling mount with lamp access on top and 2000 Hour filter with side access
- Monitor loophrough
- Instant On and Off
- Built-In Anti-theft security
- Audio passthrough for sound when projector is off
- 3000/4000 hour lamp life
- Lock slot, security bar and transition detector
- Five Year Warranty and One Year Peace of Mind Service

8788 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	2.8	3.4
60	48	5.8	7.0
80	64	7.8	9.3
100	80	9.8	11.7
120	96	11.7	14.1
150	120	14.7	17.6
200	160	19.5	23.5
300	240	29.3	35.3

Throw Ratio (distance to width) 1.5 1.8

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.

Audio Visual Products
2900 Dukane Drive
St. Charles, Illinois 60174
Toll-free: 866.280.4298
Fax: 630-584-5156
E-mail: avsales@dukane.com
Web: www.dukane.com/av

ImagePro is a registered trademark of Dukane Corporation



Specifications

Image Element	0.63" polysilicon active-matrix TFT x3
Brightness	2200 ANSI lumens (1800 lumens in Whisper Mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	500:1
Scanning Frequency	fh 15 -106 kHz, fv 50-120 Hz
Lens	Manual zoom (F1.7 - 1.9), 1.2X
Lens Throw Ratio	1.5 -1.8:1 throw distance to image width
Keystone Correction	Digital, vertical +/-30 deg
Aspect Ratio	4:3, 16:9 selectable
Computer Compatibility	SVGA, VGA, XGA, SXGA, UXGA
Video Compatibility	MAC13" and MAC16" NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, Component Video, HDTV (1080i/p, 720p, 576i, 480i/p)
Image Control	Freeze function, electronic magnification and pan
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	200W UHB
Lamp Life	3000 hours (typical) 4000 hours (whisper mode)
Audio Output	1 watt
Throw Distance	34" to 423"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) Component, Share with RGB (1) Composite video, RCA x 1 (1) S-Video, mini DIN 4-pin
Inputs, Computer	(1) RGB, 15 pin D-sub
Inputs, Audio	(1) Stereo mini jack
Outputs, Audio	(1) Stereo mini jack, adjustable level
Outputs, Monitor	RGB, 15 pin D-sub
Security	Kensington lock slot & Security Bar
Fan Level	35dB, ultra quiet; 29dB Whisper Mode
Closed Caption	For NTSC only
Operating Temperature	41-95 deg F
Power	AC 100-120V, AC 220-240V 50/60 Hz, 330 watt
Size (WxHxD)	12" x 3.0" x 8.7"
Weight	5 lbs.
Shipping Weight	15 lbs.
Carton Size	15" x 8" x 19" (est.)
Accessories Included	Remote control, batteries, power cord, RGB cable, operation manual
Safety	UL/C-UL, FCC Class B, CE, ROHS
Optional Accessories	Lamp 456-8788 Ceiling Mount, Universal; RPM-U Filter; NU06961

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR